


Premium PE Film Tape

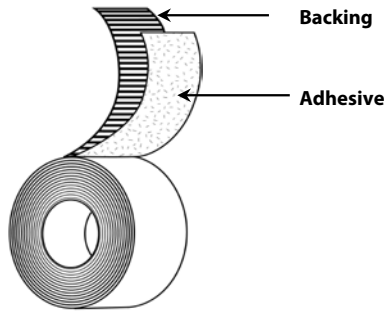

Backing:	Polyethylene Film
Adhesive:	Modified Rubber
Liner:	N/A
Colors:	White
Specifications:	N/A
Standard Sizes:	48mm x 55m, 4in x 60yd

Applications

- Heat shrink tape for marine industry and other long-term outdoor storage and transport applications up to 6 months
- Labeling & color coding
- Bundling, wrapping, and repairs
- Hanging and patching heavy weight PE sheeting, securing waste disposal bags, and more
- Polyethylene splicing
- Challenging dissimilar metal separation applications

Features

Benefits

- | | |
|---|--|
| <ul style="list-style-type: none"> • Polyethylene Film Backing | <ul style="list-style-type: none"> • Conformable and flexible • Excellent durability & solvent resistance • Excellent shrink properties |
| <ul style="list-style-type: none"> • Modified Rubber Adhesive | <ul style="list-style-type: none"> • High tack adhesive grabs surfaces • Extreme high adhesion for a secure bond • Repositionable |
| <ul style="list-style-type: none"> • Low VOC | <ul style="list-style-type: none"> • Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED® |

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	9.5 mils	0.241 mm	ASTM D-1000
Adhesion to Steel	100 oz/in	10.94 N/cm	PSTC-101
Adhesion to Backing	55 oz/in	6.02 N/cm	PSTC-101
Tensile Strength	24 lb/in	42.03 N/cm	ASTM D-1000
Application Temperature	30 to 160° F	-1 to 71° C	
Operating Temperature	20 to 200° F	-6.7 to 93° C	
Elongation	100%		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
 Standard Shelf Life (at 25C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.