




# 8150

## Heavy-Duty Surface Protection Tape

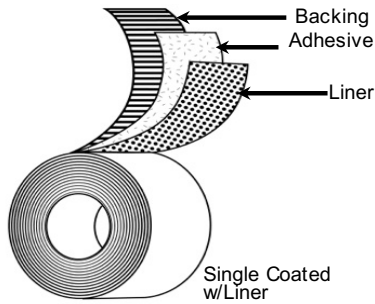

- Backing:** Interior-Grade Aromatic Polyurethane
- Adhesive:** Urethane (U510)
- Liner:** 94# Coated Kraft Paper
- Colors:** Transparent
- Specifications:** N/A
- Size Options:** Incremental sizes 1/4" - 48" x 108Ft

### Applications

- Permanent or temporary surface protection
- Anti-squeak, vibration, and sound damping for marine and automotive OEM
- Protective film for shot peening in metal cleaning operations
- Surface protection for air foil and ground effects panels on racing cars and trucks

### Features

### Benefits

- |                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• Polyurethane Film Backing</li> <li>• Acrylic Adhesive</li> <li>• Kraft Paper Release Liner</li> </ul> | <ul style="list-style-type: none"> <li>• Highly elastic and very tough</li> <li>• Abrasion resistant</li> <li>• Extra thick for stay-flat and dimensional stability</li> <li>• Conformable for curves and irregular surfaces</li> <li>• Transparent for easy inspection</li> <li>• High strength bond to smooth or irregular surfaces</li> <li>• Excellent solvent resistance</li> <li>• Smooth clean release - easy to use</li> <li>• Die cuttable</li> </ul> |
|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Typical Test Values

	Standard UOM		Metric UOM		Test Method
<b>Total Thickness</b>	14.0	mils	0.356	mm	PSTC-133
<b>Substrate Thickness</b>	12.0	mils	0.305	mm	PSTC-133
<b>Adhesion to Steel</b>	45	oz/in	4.92	N/cm	ASTM D-3330
<b>Tensile Strength</b>	100	lb/in	175.13	N/cm	ASTM D-3759
<b>Elongation</b>	600%				
<b>Abrasion/Wear Index</b>	7				ASTM D-4060
<b>Application Temperature</b>	50 to 120 °F		10 to 49 °C		
<b>Operating Temperature</b>	-65 to 300 °F		-54 to 149 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F

Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038  
 1-800-343-7875 Fax 1-800-328-4822  
 www.berryglobal.com  
 10/8/17