


## Flame Retardant Galley Tape

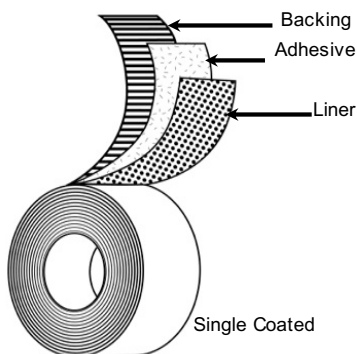

- Backing:** PVC Film
- Adhesive:** Acrylic
- Liner:** 53# Coated Kraft Paper
- Colors:** Black
- Specifications:** FAR 25.853(a) Appendix F for Interior Aircraft Use; Fokker FK05-159 & FK05-160; Bombardier 91-25-1, 91-25-2, 91-25-3, 91-25-4, 91-25-5, 9-25-6; A-A-1689B, Type II (supersedes PPP-T-66E, Type 1, Class 2)
- Size Options:** Incremental sizes 1/4" - 54" x 108Ft

### Applications

- Aircraft wet seal applications in main cabin areas such as galleys, lavatories, entryways, and other areas that are susceptible to moisture
- Aircraft corrosion inhibitor

### Features

- PVC Film Backing
- Rubber Based Adhesive
- Kraft Paper Release Liner

### Benefits

- Tough and conformable
- Exceptional moisture resistance
- Allows wide-width usage
- Flame retardant - meets key industry standards
- Permanent bond, will not delaminate
- Compatible with most sealants
- Smooth clean release - easy to use
- Die cuttable

### Typical Test Values

	Standard UOM		Metric UOM		Test Method
<b>Total Thickness</b>	9.5	mils	0.241	mm	PSTC-133
<b>Substrate Thickness</b>	8.5	mils	0.216	mm	PSTC-133
<b>Adhesion to Steel</b>	50	oz/in	5.47	N/cm	ASTM D-3330
<b>Tensile Strength</b>	25	lb/in	43.78	N/cm	ASTM D-3759
<b>Puncture Resistance</b>	12	lbs	5.44	kg	ASTM D-1000
<b>Abrasion Index</b>	1.52 g/100in <sup>2</sup> /day				ASTM D-3833
<b>Elongation</b>	200%				
<b>Application Temperature</b>	50 to 120 °F		10 to 49 °C		
<b>Operating Temperature</b>	-40 to 200°F		-40 to 93°C		
<b>Abrasion Index</b>	34				ASTM D-4060

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F  
 Standard Shelf Life (at 25C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.