


Utility Grade Pipewrap Tape

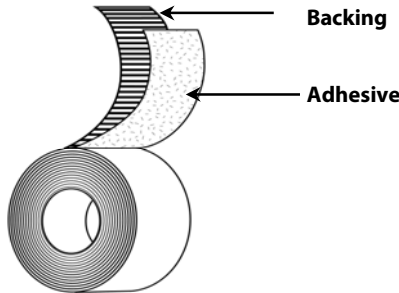

Backing:	Printed PVC Film
Adhesive:	Rubber Based
Liner:	N/A
Colors:	Black
Specifications:	Meets UPC, ANSI & IAPMO standards
Standard Sizes:	48mm x 31M

Applications

- Under and above-ground pipe wrap applications.
- Industrial assembly.

Features

- PVC Film Backing
- Rubber Adhesive

Benefits

- Tough and conformable.
- Protects against UV, moisture, acids, alkalides, abrasion, and corrosion.
- Provides a strong long-term bond.
- No flagging or lifting.

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	10 mils	254 mic	ASTM D-1000
Adhesion to Steel	15 oz/in	1.6 N/cm	PSTC-101
Tensile Strength	20 lb/in	35 N/cm	ASTM D-1000
Elongation	100%		
Operating Temperature	0 - 200° F	-18 - 93° C	

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
Standard Shelf Life (at 25C): 12 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.