


Double-Coated Polyester Film Tape

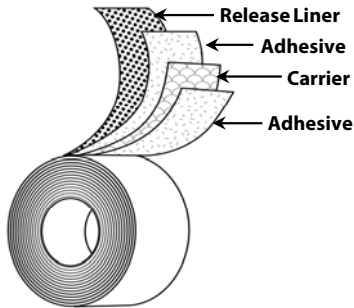

Carrier: Polyester Film

Adhesive: Acrylic

Liner: Brown Kraft Paper

Colors: Natural (adhesive color)

Specifications: N/A

Standard Sizes: 1"x60Yd, 1.5"x60Yd, 2"x60Yd, 3"x60Yd

Applications

- Corrugate splicing/manufacturing
- Paper converting
- Laminating & frame mounting
- Foil manufacturing
- Printing & plate mounting applications
- High temperature laminating

Features

- Polyester Film Reinforcement
- Acrylic Adhesive
- Kraft Paper Release Liner

Benefits

- Outstanding conformability for continuous adhesion on irregular surfaces
- Conformable and moisture resistant
- Thin for low-profile splices
- Good tack and adhesion
- Eliminates downtime from adhesive bleeding and splice failure
- Excellent temperature resistance
- Die-cuttable

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	3.8 mils	96.52 mic	ASTM D-1000
Adhesion to Steel	25 oz/in	2.74 N/cm	PSTC-101
Tensile Strength	6 lb/in	10.51 N/cm	ASTM D-1000
Elongation	30%		ASTM D-1000
Operating Temperature	0 to 395 °F	-17 - 201 °C	

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
 Standard Shelf Life (at 25C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.