


Utility Grade Filament Tape

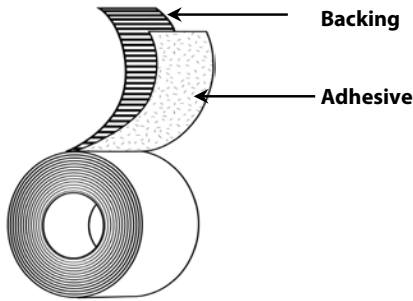

Backing:	Fiberglass-Reinforced Polypropylene Film
Adhesive:	Synthetic Rubber
Liner:	N/A
Colors:	Transparent
Specifications:	FDA CFR21.B.175.105 for indirect food packaging
Standard Sizes:	12mmx55M, 18mmx55M, 24mmx55M

Applications

- General purpose strapping tape for light-duty applications.
- Pallet and corrugate strapping.
- Package & box sealing.
- Bundling & wrapping.

Features

- Mono-Directional Filament Reinforcement
- Rubber Adhesive

Benefits

- High strength.
- Durable.
- Provides a strong long-term bond.
- No flagging or lifting.

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	3.9 mils	99.06 mic	ASTM D-1000
Adhesion to Steel	69 oz/in	7.55 N/cm	PSTC-101
Tensile Strength	100 lb/in	175.12 N/cm	ASTM D-1000
Elongation	4%		
Operating Temperature	40 - 150° F	4 - 65° C	

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
Standard Shelf Life (at 25C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.