


# 334CRT

## Cooler Repair Tape

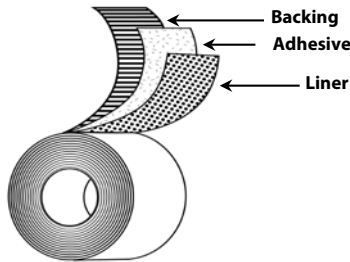

**Backing:** Embossed Foil Laminate

**Adhesive:** Acrylic

**Liner:** White Kraft Paper

**Colors:** Silver (Alu), White

**Specifications:** Tested in accordance with UL723

**Standard Sizes:** 4" x 15yd

### Applications

- Seals seams, cracks and corners against air leakage for walk-in refrigeration units, refrigerated display cases and trailers, industrial coolers, and more
- Sealing & patching insulation cladding and jacketing

### Features

- Embossed Foil Laminate Backing
- All Temperature Acrylic Adhesive
- Tested in accordance with UL 723
- Low VOC Content

### Benefits

- Excellent conformability
- Resists UV, MOLD, and MOISTURE
- Zero permeability - provides a superior vapor barrier
- TOUGH! High strength to resist tear and puncture
- Withstands very cold and very hot application and operating conditions
- Excellent quick stick for an instant seal
- Meets flammability and safety requirements for use in refrigeration appliances
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

### Physical Properties

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	10.2 mils	259.1 mic	PSTC-133
<b>Adhesion to Steel</b>	100 oz/in	10.95 N/cm	PSTC-101
<b>Adhesion to Backing</b>	80 oz/in	8.8 N/cm	PSTC-101
<b>Shear Strength</b>	>72 hours		PSTC-107 @ 2.2 PSI
<b>Tensile Strength</b>	70 lb/in	122.58 N/cm	PSTC-131
<b>Permeance</b>	0.0 perms		ASTM E-96
<b>Puncture Resistance</b>	43 lb	191 N	ASTM D-1000
<b>Operating Temperature</b>	-30 to 270 °F	-34 to 132 °C	
<b>Application Temperature</b>	-25 to 248 °F	-32 to 120 °C	
<b>Smoke Developed</b>	<50		UL 723
<b>Flame Spread</b>	<25		UL 723
<b>VOC Content</b>	< 30 g/L		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F  
Standard Shelf Life (at 25C): 12 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038  
1-800-343-7875 Fax 1-800-328-4822  
www.berryplastics.com

Nijverheidsstraat 10  
2260 Oevel (Westerlo) Belgium  
32-014-722500 Fax 32-014-722570  
4/12/13