




## Shadowlastic™ Plus - Window & Door Flashing Tape

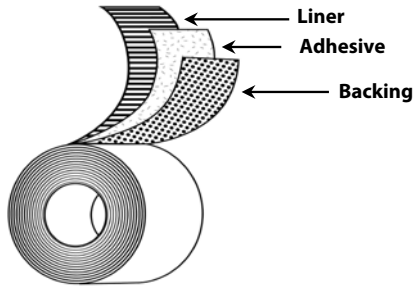

- Backing:** Woven Polyethylene (Printed)
- Adhesive:** Butyl Rubber
- Liner:** Paper
- Colors:** Black
- Specifications:** AAMA-711, ASTM E2112
- Standard Sizes:** 4" x 100Ft, 6" x 100Ft, 9" x 100Ft

### Applications

- Window & door installations
- Corner board abutments
- Sidewall sheathing seams
- Deck-to-wall joints
- Sealing other detail areas against water and air penetration

### Features

- Woven Polyethylene Backing
- Butyl Rubber Adhesive
- Paper Release Liner

### Benefits

- Conformable and durable
- Excellent air and moisture barrier properties
- Suitable for up to 3 years outdoor UV exposure
- Provides permanent weather-tight seal on most clean, dry building surfaces
- Good all-temperature performance
- Compatible with sealants & caulking
- Self-healing after puncture
- Easy to remove

### Physical Properties

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	20 mils	508 mic	ASTM D-1000
<b>Adhesion to Steel</b>	219 oz/in	23.97 N/cm	ASTM D903-93
<b>Adhesion to Plywood</b>	63 oz/in	6.85 N/cm	ASTM D903-93
<b>Adhesion to OSB</b>	64 oz/in	7.0 N/cm	ASTM D903-93
<b>Adhesion to PVC</b>	162 oz/in	17.69 N/cm	ASTM D903-93
<b>Adhesion to Housewrap</b>	210 oz/in	22.94 N/cm	ASTM D903-93
<b>Tensile Strength</b>	59 lb/in	103.33 N/cm	ASTM D412-97
<b>Installation Temperature</b>	30 to 180° F	-1 to 82° C	
<b>Operating Temperature</b>	-30 to 200° F	-34 to 93° C	

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F  
 Standard Shelf Life (at 25C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038  
 1-800-343-7875 Fax 1-800-328-4822  
[www.berryplastics.com](http://www.berryplastics.com)

Nijverheidsstraat 10  
 2260 Oevel (Westerlo) Belgium  
 32-014-722500 Fax 32-014-722570  
 2/8/13