


Composite Adhesive Tape

No.354E-15

Features

- Offers superior electric insulation and electrolytic corrosion properties.
- Offers superior flame-retardant and thermal resistance (.UL510 listed File No. : E-34833)

Construction

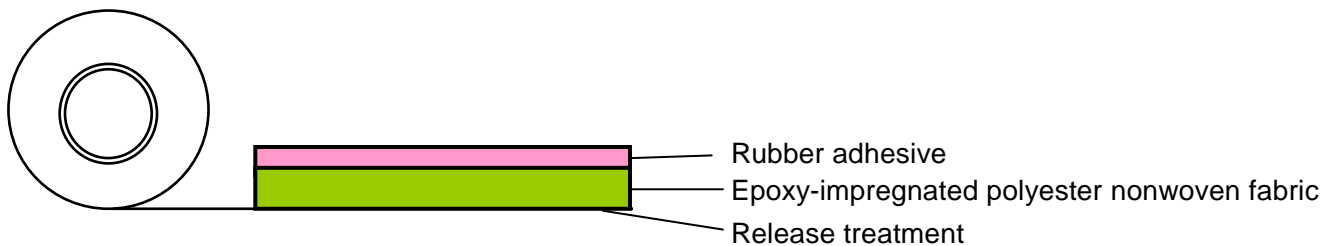

Applications

- Interlayer insulation and termination of transformers
- Outer insulation and termination of coils

Properties

Table1. General properties

Item	Unit	No.354E-15
Total thickness(Backing)	mm	0.15 (0.12)
Adhesion to steel	N/19mm	6.4
Unwinding force	N/19mm	3.5
Tensile at break	N/19mm	115
Elongation at break	%	21
Breakdown voltage	kV	7.5
Electrolytic corrosion factor	—	1.00
Flame retardant	—	UL510FR
Thermal resistance	—	Temperature rating : 130°C

Contact : Nitto Shinko Corporation Customer Support Center E-Mail tsc-nsk@nitto.co.jp

NO.354E-15 1/1
5001-38605-1403_E

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.