

NITOFLON

No.923SL

Outline

NITOFLON NO.923SL is a tape using polytetrafluoroethylene (PTFE) film as base material. Single surface treated and coated with silicone adhesive with excellent heat resistance.

The tape exhibits superior features such as desirable electrical properties, heat resistance, chemical resistance and non-adhesiveness.

Structure

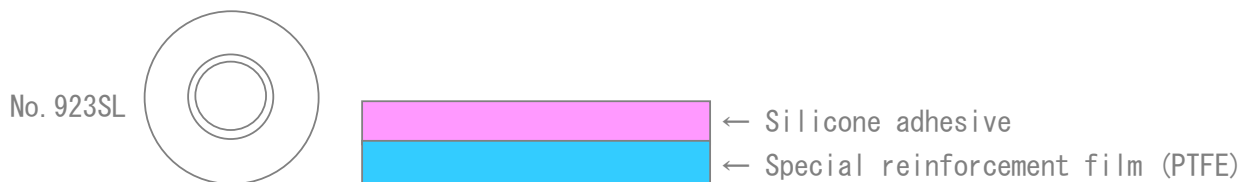


Fig. 1

Features

- The non-adhesive side exhibits excellent features of polytetrafluoroethylene (PTFE) such as electrical properties, resistance to heat, weather, chemical, and water (water shedding), and non-adhesiveness.
- Superior tensile strength.
- Superior flame resistance.
- Can be used in a wide range of temperature (-60°C to 200°C), however, it may vary according to the use condition.

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

Applications

- For roll wrapping in polyethylene laminators (Suitable for long continuous use as the tape has superior durability and mechanical strength).
- For endless belts of polyethylene laminators (Depending on application, Time for changing tapes upon dimensional change of laminated products can be shortened by making a double-layered endless belt, adhering with NITOFロン No.923UL or No.923S.)
- For insulation of coils as a class H insulating material.
- Can be laminated with metals, plastics and ceramics as general sliding materials.

General Properties

Table

Items	Unit	Characteristic value
Thickness	mm	0.17
Tensile strength	N/19mm	240
Elongation	%	80
Peeling strength(Stainless steel plate)	N/19mm	7.9
Unwinding force	N/19mm	7.1
Breakdown voltage	KV	19
Flame resistance	-	UL510 Flame Retardant (File No.E34833)
Temperature Use Range	°C	-60 to 200

*The above values are sample observed values, not the guaranteed performance.

Cares

- Store the product in the place where direct sunlight and high temperature do not affect.
- Clean up the dusts and oil on the face, before the adhesive put on.

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.