

## P02 MULTI-PURPOSE DOUBLE-COATED SPLICING & MOUNTING TAPE


### GENERAL DESCRIPTION

A highly versatile double-coated tape that boasts super-aggressive adhesion. Designed for a variety of splicing, mounting, holding, laminating, and fastening applications.

### FEATURES

- Coated on both sides with an aggressive, synthetic rubber/resin adhesive that makes it ideal for splicing medium-to-heavyweight paper stocks
- Provides high shear strength, high initial tack.
- Solvent resistant-will not dissolve when exposed for limited periods to solvents such as MEK, carbon tetrachloride, gasoline or alcohol.
- Interliner removes easily, even after exposure to high pressure-laminating operations

### PRODUCT CONSTRUCTION

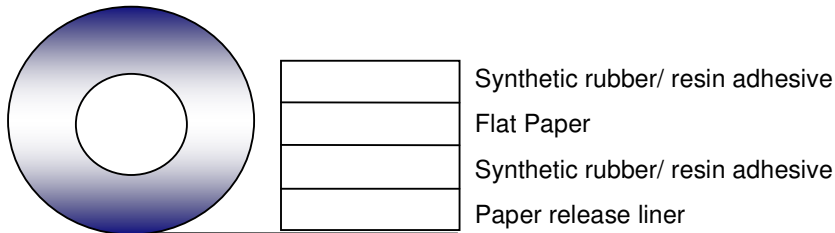

### APPLICATION

- Designed for a variety of splicing, mounting, holding, laminating and fastening applications, especially wherever tape conformability and strength are vital.
- Also ideal for glass and metal surfaces
- Recommended for holding metal in place during machining operations for anchoring metal plates, type, cuts and patches to printing forms: and, for mounting small fixtures, display items and mountings.
- Can be die-cut or shear-cut to any size or shape

### PROPERTIES

<b>Backing Material</b>	Flat Kraft Paper	
<b>Adhesive</b>	Synthetic Rubber / Resin	
<b>Color</b>	White	
	<b>Imperial</b>	<b>Metric</b>
<b>Total Tape Thickness</b>	7.4 mils	0.190 mm
<b>Adhesion to Steel</b>	58 oz/in	6.5 N/10 mm
<b>Elongation</b>	5%	5%
<b>Government Specifications</b>	FDA Title 21, Part 175.105 / CID A-A-180	

**\*CAUTION:** The above are typical values and should not be used in writing specifications. Customer is responsible to ensure product meets intended application requirements before approved for use.

--	--	--

For more information on this product visit our website @ [www.nittousa.com](http://www.nittousa.com) or call toll free 1-800-755-8273