


PE Acid-Free Overlaminating Tape

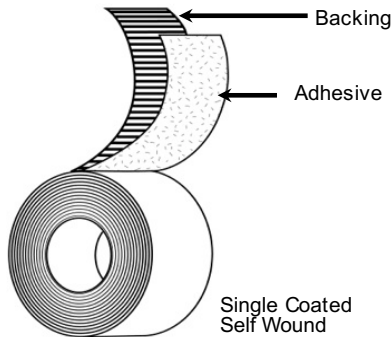

Backing:	LDPE Film
Adhesive:	Acid-Free Acrylic (A115)
Liner:	N/A
Colors:	Clear
Specifications:	N/A
Size Options:	Incremental widths 1/4" - 54" x 60ft

Applications

- Protective overlaminate for graphics, signs, and placards
- Surface protection against moisture, UV, solvents, and abrasion

Features

- LDPE Film
- Acid-Free Acrylic Adhesive

Benefits

- Tough and abrasion resistant
- Conformable
- Stands up to harsh environments
- Super clear film for invisible protection
- Adheres aggressively to surfaces
- Non-yellowing
- No edge bleed
- Excellent long-term stability

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	4.5	mils	0.114	mm	PSTC-133
Substrate Thickness	3.5	mils	0.089	mm	PSTC-133
Adhesion to Steel	70	oz/in	7.66	N/cm	ASTM D-3330
Tensile Strength	10	lb/in	17.51	N/cm	ASTM D-3759
Elongation	400%				
Application Temperature	50 to 120 °F		10 to 49 °C		
Operating Temperature	-40 to 200 °F		-40 to 93 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F
 Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.