




8450

Heavy-Duty Surface Protection Tape

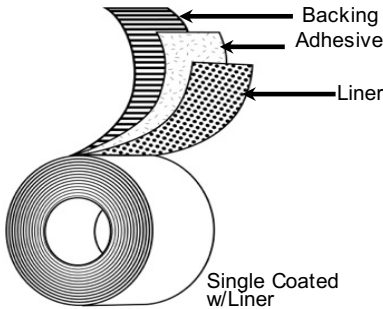

Backing:	Interior-Grade Aromatic Polyurethane
Adhesive:	Acrylic (A106)
Liner:	94# Coated Kraft Paper
Colors:	Matte Black
Specifications:	N/A
Size Options:	Incremental sizes 1/4" - 31" x 108Ft

Applications

- Surface protection on high-wear surfaces prone to scratching, chipping, and weathering
- Squeak and rattle protection
- Moisture barrier applications
- Indoor industrial surface protection
- Insulation and sound damping

Features

- Polyurethane Film Backing
- Acrylic Adhesive
- Kraft Paper Release Liner

Benefits

- Protects and holds under heavy usage
- Tough and durable - abrasion resistant
- Conformable for curves and irregular surfaces
- High strength bond to smooth or irregular surfaces
- Excellent aging characteristics
- Smooth clean release - easy to use
- Die cuttable

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	9.5	mils	0.241	mm	PSTC-133
Substrate Thickness	7.0	mils	0.178	mm	PSTC-133
Adhesion to Steel	75	oz/in	8.21	N/cm	ASTM D-3330
Tensile Strength	40	lb/in	70.05	N/cm	ASTM D-3759
Elongation	700%				
Application Temperature	50 to 120 °F		10 to 49 °C		
Operating Temperature	-40 to 250 °F		-40 to 121 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F
 Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
 1-800-343-7875 Fax 1-800-328-4822
 www.berryglobal.com
 10/8/17