


Premium Self-Wound Foil Tape

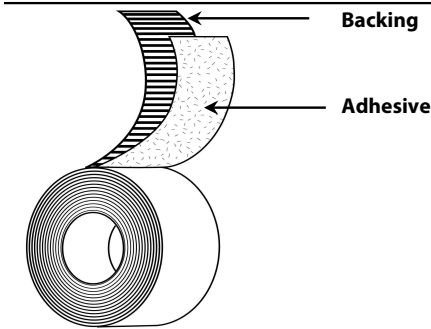

Backing: Aluminum Foil

Adhesive: Acrylic

Liner: N/A

Colors: Aluminum

Specifications: N/A

Standard Sizes: 48mm x 55m

Applications

- Taping joints and seams in duct work for A/C, heating, and ventilation systems
- Insulation seaming and patching
- Sealing insulation and repairing in cooler/refrigeration applications
- General purpose industrial and automotive uses
- Aircraft sealing & masking
- Window mask to protect aircraft canopies, windshields and passenger window surfaces from crazing or hazing during paint stripping

Features

- Heavy Duty Foil Backing
- Acrylic Adhesive
- Self Wound Construction

Benefits

- Provides a barrier to air, moisture and corrosion
- Acts as a heat shield to minimize heat transfer
- Conformable for irregular surfaces and contours
- Excellent bond to most surfaces
- Solvent resistant
- Excellent high temperature performance
- No release liner minimizes waste

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	4.2 mils	106.68 mic	ASTM D-1000
Foil Thickness	2.0 mils	50.8 mic	ASTM D-1000
Adhesion to Steel	90 oz/in	9.85 N/cm	PSTC-101
Tensile Strength	14 lb/in	24.52 N/cm	ASTM D-1000
Operating Temperature	-35 to 300° F	-37 to 149° C	
Minimum Application Temp	-25° F	-32° C	

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
 Standard Shelf Life (at 25C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.